

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2005 (06.05.2005)


PCT

(10) International Publication Number  
**WO 2005/039391 A2**

- (51) International Patent Classification<sup>7</sup>: **A61B**
- (21) International Application Number:  
PCT/US2004/035014
- (22) International Filing Date: 21 October 2004 (21.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/513,157 21 October 2003 (21.10.2003) US  
10/764,650 26 January 2004 (26.01.2004) US  
10/764,651 26 January 2004 (26.01.2004) US
- (71) Applicant (for all designated States except US): **THE BOARD OF TRUSTEES OF THE LELAND STANFORD JUNIOR UNIVERSITY [US/US]**; Office of Technology Licensing, ID Mail Code : 1850, 1705 El Camino Real, Palo Alto, CA 94306-1106 (US).
- (72) Inventor: **SHAHIDI, Ramin [IR/US]**; 300 Pasteur Dr.MC:5327, Palo Alto, CA 94305 (US).
- (74) Agent: **STATTLER JOHANSEN & ADELI**; P.O.Box 51860, Palo Alto, CA 94303-0728 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: SYSTEMS AND METHODS FOR INTRAOPERATIVE TARGETTING

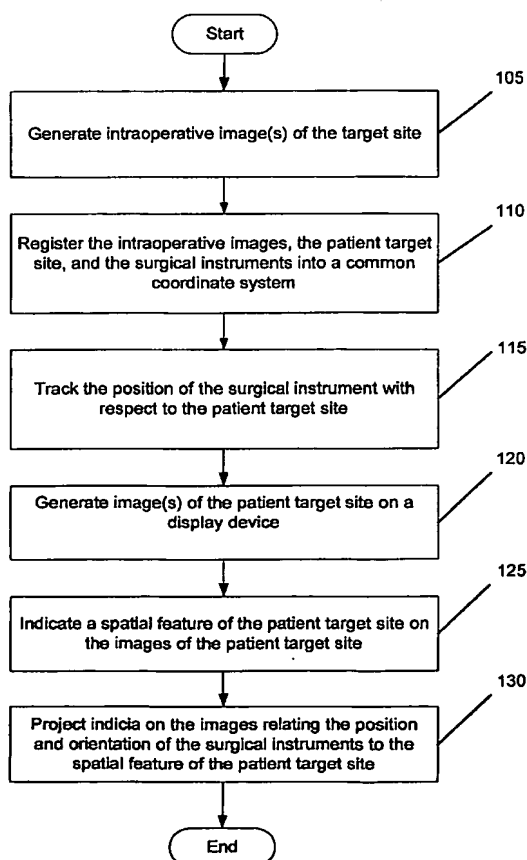

(57) Abstract: The method of some embodiments of the invention assists a user in guiding a medical instrument to a subsurface target site in a patient. This method generates at least one intraoperative ultrasonic images. The method indicates a target site on the ultrasonic image(s). The method determines 3-D coordinates of the target site in a reference coordinate system. The method (1) tracks the position of the instrument in the reference coordinate system, (2) projects onto a display device a view field as seen from the position with respect to the tool in the reference coordinate system, and (3) projects onto the displayed view field indicia of the target site corresponding to the position. In some embodiments, the field of view is a view not only from the position of the instrument but also from a known orientation of the instrument in the reference coordinate system. By observing the indicia, the user can guide the instrument toward the target site by moving the instrument so that the indicia are placed or held in a given state in the displayed field of view.

WO 2005/039391 A2



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*